

CONA[®] M

Thermostatic steam trap

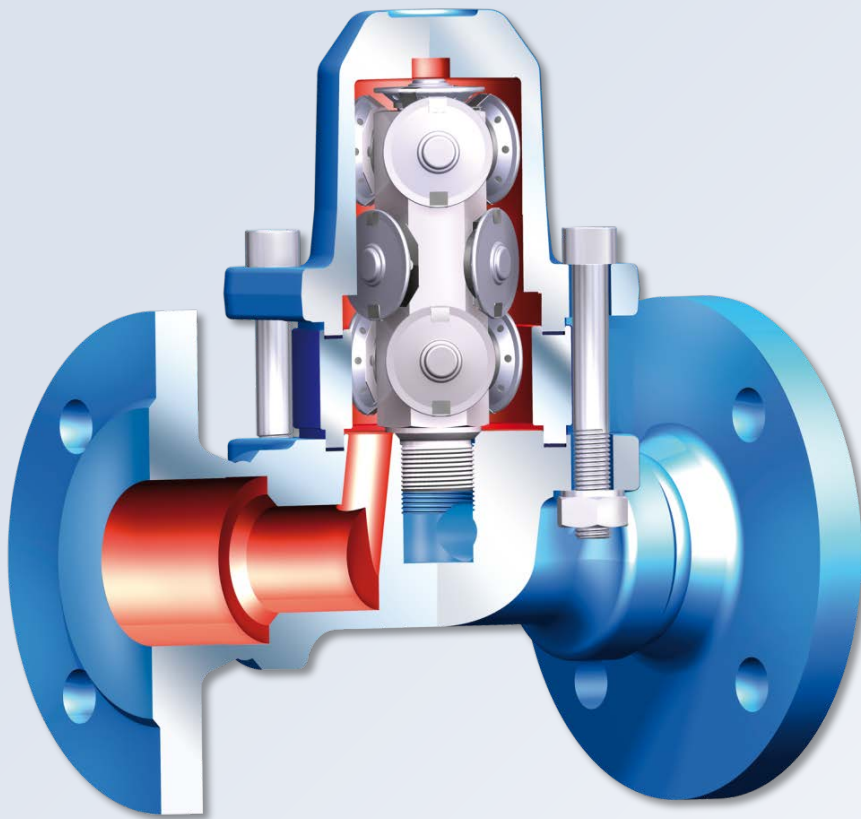


Fig. CONA[®] M 616

- ▶ DN15 – DN50
- ▶ PN16 – 40 / ANSI150 – ANSI300
- ▶ Temperature up to 450°C
- ▶ For discharging of slight to highly sub-cooled condensate
- ▶ Automatic air-venting during start up and operation of the plant
- ▶ Multiple connection types
- ▶ Body material
 - EN-JL 1040
 - 1.0460
 - 16Mo3
 - 1.4301
 - 1.4305
 - 1.4541
- ▶ Robust and resistant to water-hammer
- ▶ Integrated non return protection
- ▶ Construction:
 - With inside strainer
 - With outside strainer – Fig. 612/613(Y)
- ▶ Available types of capsule (sub-cooling from 5K to 40K)
- ▶ Optional
 - blow down valve

CONA[®] M



Highly responsive for efficient performance (using ultra-sensitive rapid-reaction control fluid)



Water hammer protection for long life (integral check valve)

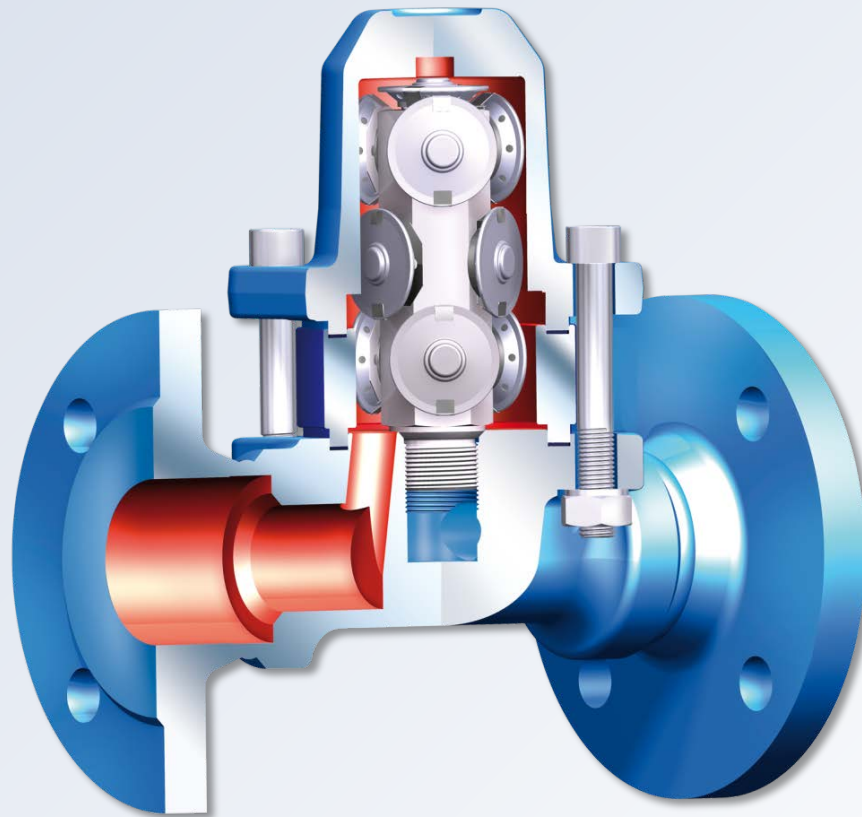


Fig. CONA[®] M 616



Contamination protection for long life (easy-to-clean external strainer)

CONA[®] M

