



STEVI[®] 405 / 460

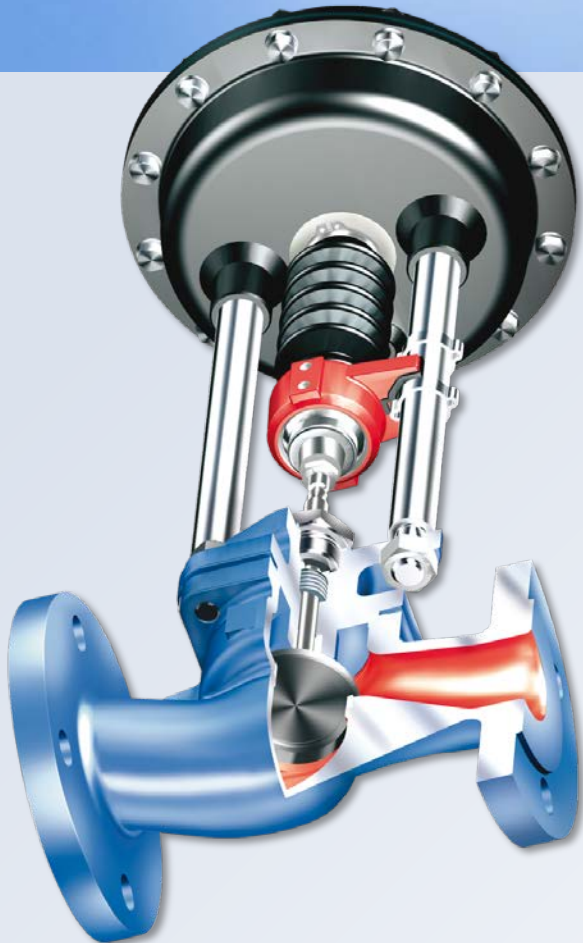

Your compact stop valve with E- (electric) or DP- (pneumatic) actuator!

- ▶ Straight through
- ▶ DN15 – DN500
- ▶ PN16 – PN40
- ▶ Temperature -10°C up to +450°C
- ▶ Precision guided stem
- ▶ Burnished stem
- ▶ Spring loaded PTFE-V-ring unit
- ▶ Body material
 - EN-JL 1040
 - EN-JS 1049
 - 1.0619+N
 - 1.4408
- ▶ Electric and pneumatic actuators
- ▶ Optional
 - stainless steel bellows seal

STEVI® 405 / 460

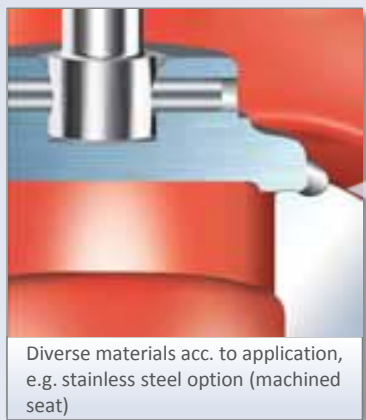


Diverse materials acc. to application, e.g. stainless steel option (machined seat)




Sealing options for flexibility (here: plug with PTFE-insert)


STEVI® 405 / 460

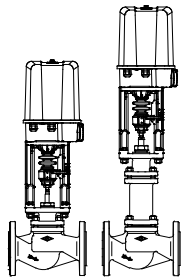

▶ 405/460 Stop valve with electric actuator Premio 2,2 kN - 15 kN

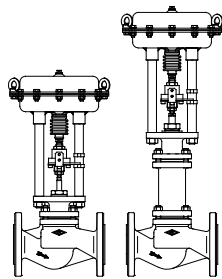

▶ 405/460 Stop valve with pneumatic actuator DP 32 - 35

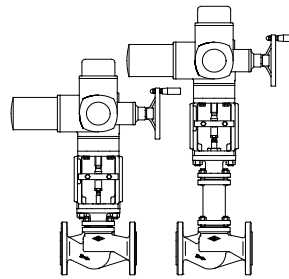

▶ 405/460 Stop valve with electric actuator AUMA SA 07.2 - 16.2