


# FABA<sup>®</sup> SUPRA I / C

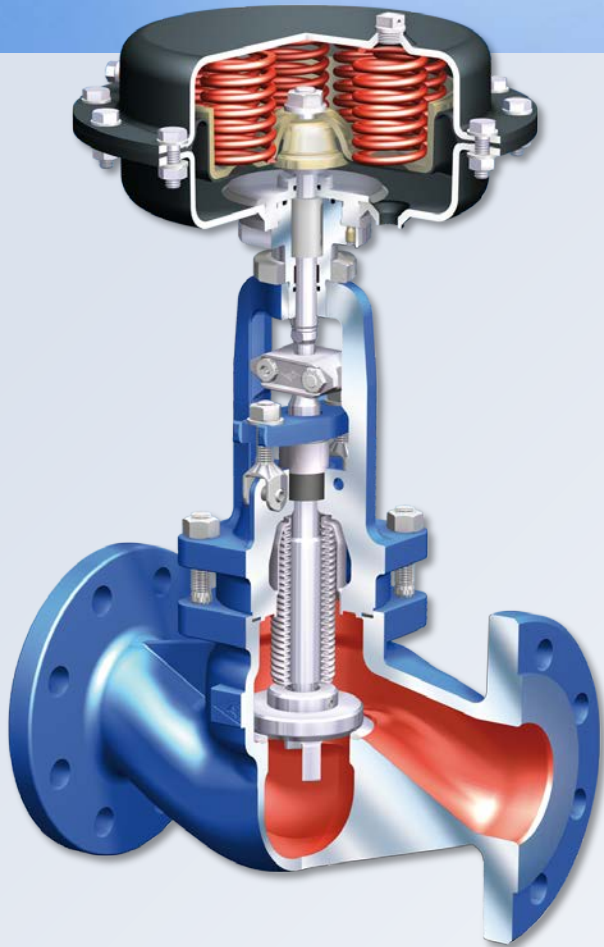


## The new generation – for industrial / chemical applications!

- ▶ Stop valve with bellows seal
- ▶ DN 15 – DN 300
- ▶ PN6 – PN40 / ANSI Class 300
- ▶ Temperature -10°C – +450°C
- ▶ Metallic sealing
- ▶ Maintenance-free
- ▶ Double wall bellows seal as standard
  - bellows seal welded to bonnet
  - bellows seal 10.000 load cycles
  - Supra I – bellows seal shielded
  - Supra C – bellows seal flushed
- ▶ Stem back seal
- ▶ Secondary sealing: gland packing (with bridge)
- ▶ Yoke gasket, double chambered
- ▶ Plug with marginal seat
- ▶ Welded seat
- ▶ Body material
  - 1.0619+N
  - 1.0460
  - 1.4408
  - 1.4581
  - SA216WCB
- ▶ External stem thread
- ▶ Stem with roll hardened thread
- ▶ Actuator retrofitting



# FABA<sup>®</sup> SUPRA I / C




Bellows cover – for increased resistance to water hammer

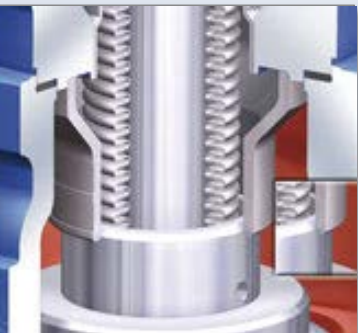

Rugged plug / stem guide – permits higher differential pressures

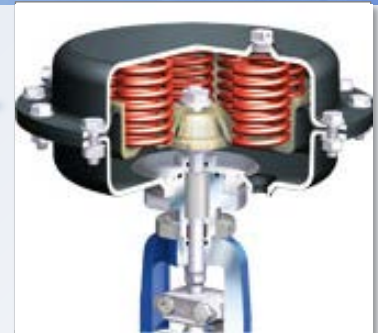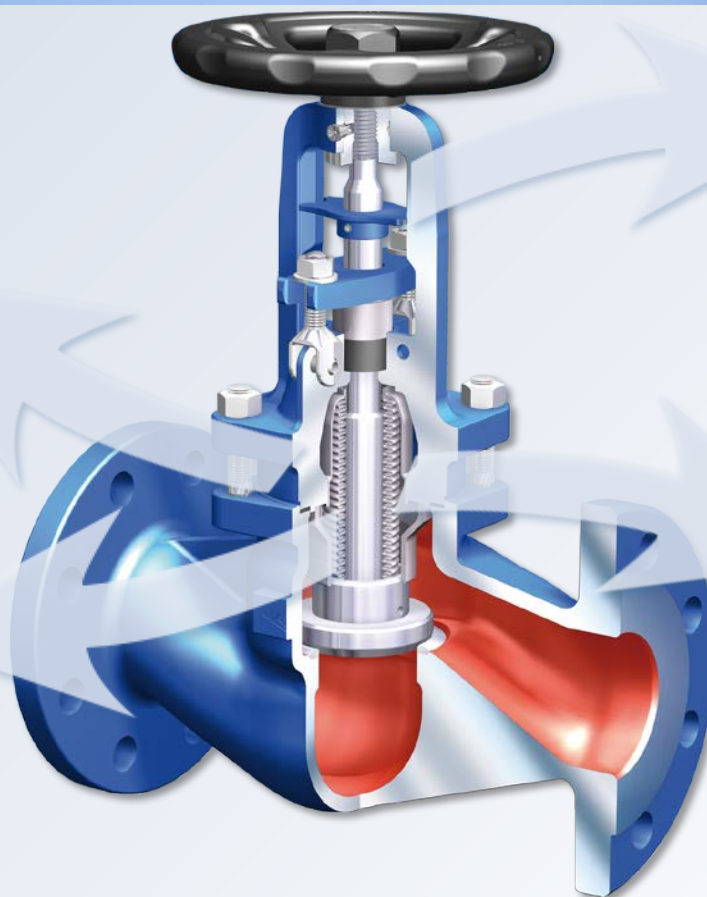


Two-piece stem allows retro-fitting with pneumatic actuator

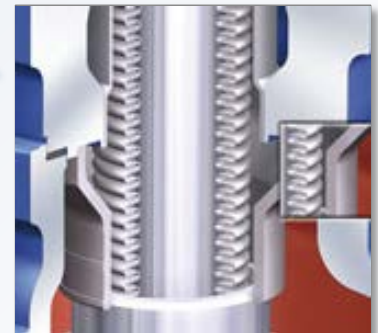


Reinforced bellows (10,000 complete cycles) – welded to the top part of the body


# FABA® SUPRA I / C




▶ 146 – Straight through with flanges




▶ 146 - Straight through with flanges with pneumatic actuator ARI-FA




▶ 169 – Y-pattern with flanges




▶ 140 – Straight through with butt weld ends




▶ 140 – Straight through with butt weld ends




▶ 166 – Y-pattern with butt weld ends



▶ 147 – angle patterns with flanges



▶ 146 – straight through with stem extension, two-piece stem



▶ 146 – straight through with stem extension, one-piece stem