

# K85

**K85 111.779 class150 DN1/2" – 4"  
Ball valve flange ANSI**



**Size :** DN 15 to 200 mm ( NPS 1/2" to 8" )  
**Ends :** CLASS 150 PN20 R.F. Flanges  
**Min Temperature :** - 20°C  
**Max Temperature :** + 200°C  
**Max Pressure :** 20 Bars  
**Specifications :** ISO 5211 mounting pad  
PTFE filled with 15% glass seat  
Anti blow-out stem  
Atex  
Fire safe according to API607 up to DN150 ( 6" )

**Materials :** Stainless steel

### SPECIFICATIONS :


- Full bore
- Anti blow-out stem
- PTFE filled with 15% glass seat
- Locking device
- ISO 5211 mounting pad
- 2 pieces type ( Split body )
- Hollowed ball from DN125 to DN200
- With exhaust hole in the ball ( located in the top of the ball to avoid overpressure in it )

### USE :

- Chemical industries, petrochemical industries, hydraulic installation, compressed air, heating and water distribution
- Steam : 11 bars maximum
- Min and max Temperatures Ts : -20°C to + 200°C
- Max Pressure Ps : 20 bars ( see graph under )

### PRESSURE / TEMPERATURE GRAPH ( STEAM EXCLUDED ) :

**PRESSURE  
( Bar )**

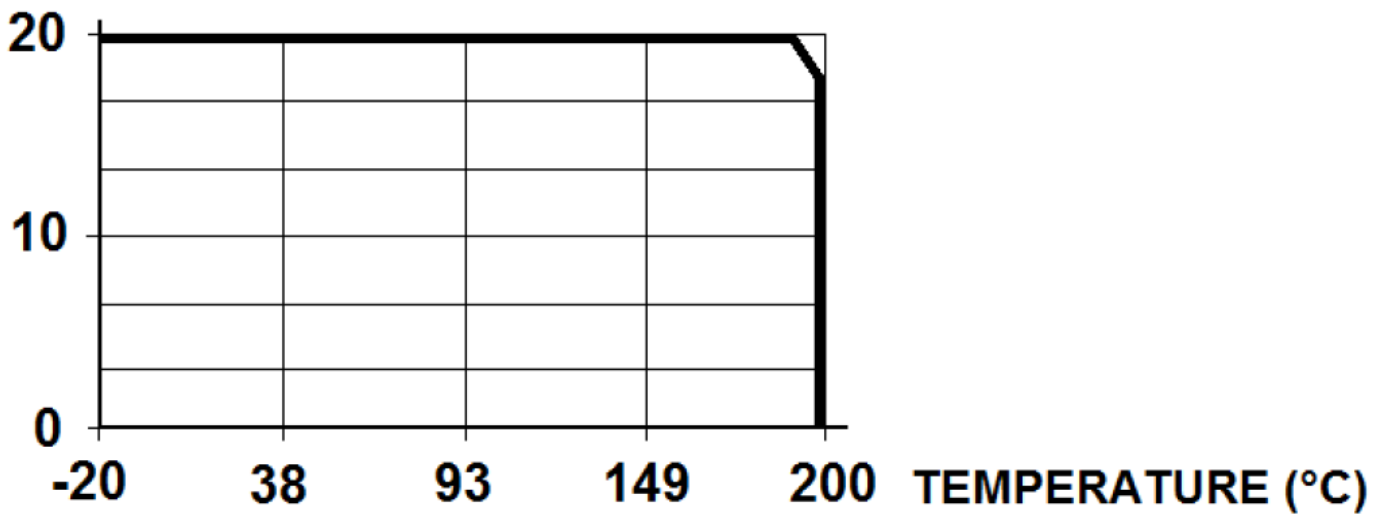

### RANGE :

- 2 pieces stainless steel body valve Class 150 (PN20) **Ref. 779** from DN 15 to DN 200 ( NPS 1/2" to 8" )
- Gearbox possible **Ref. 9830296-9830297** from DN 150 to DN 200 ( NPS 6" to 8" )


### ENDS :

- R.F. Flanged Class 150 (PN20)

# K85

## K85 111.779 class150 DN1/2" – 4" Ball valve flange ANSI

MATERIALS DN 15 - 50 ( NPS 1/2" to 2" ):

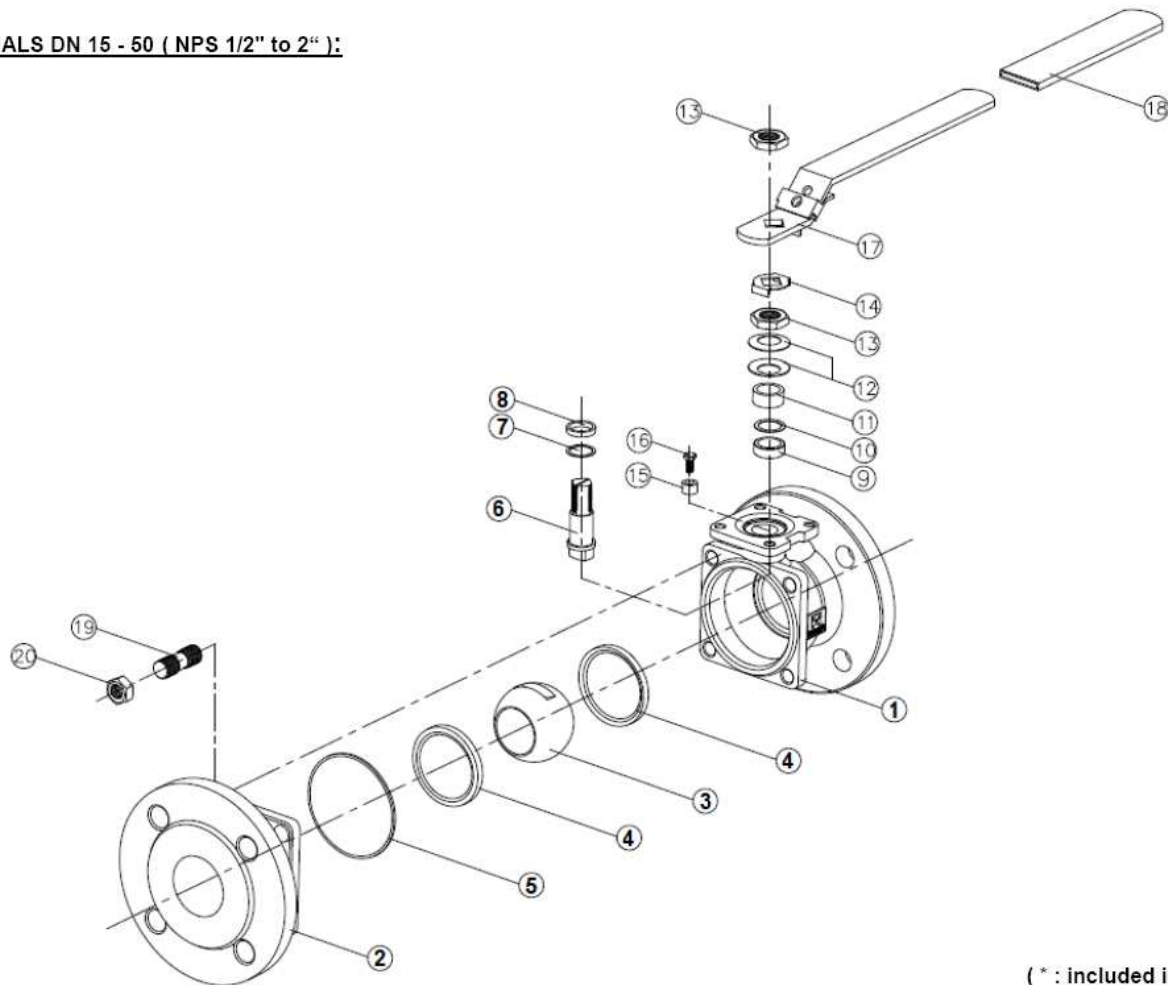


(\* : included in gaskets kit)

| Item | Designation   | Materials                   |
|------|---------------|-----------------------------|
| 1    | Body          | ASTM A351 CF8M              |
| 2    | Ends          |                             |
| 3    | Ball          | ASTM A351 CF8M              |
| 4*   | Seat          | PTFE filled with 15% glass  |
| 5*   | Body seal     | Graphite                    |
| 6    | Stem          | ASTM A276 316               |
| 7*   | Ring          | PTFE filled with 25% carbon |
| 8*   | Ring          |                             |
| 9*   | Packing       | Graphite                    |
| 10*  | Packing       | PTFE filled with 25% carbon |
| 11   | Packing gland | AISI 304                    |
| 12   | Elastic ring  | AISI 301                    |
| 13   | Nut           | AISI 304                    |
| 14   | Washer        |                             |
| 15   | Pin           |                             |
| 16   | Pin screw     |                             |
| 17   | Handle        | PVC                         |
| 18   | Handle cover  |                             |
| 19   | Stud          | AISI 304                    |
| 20   | Nut           |                             |

# K85

## K85 111.779 class150 DN1/2" – 4" Ball valve flange ANSI

MATERIALS DN 65 - 100 ( NPS 2"1/2 to 4" ):

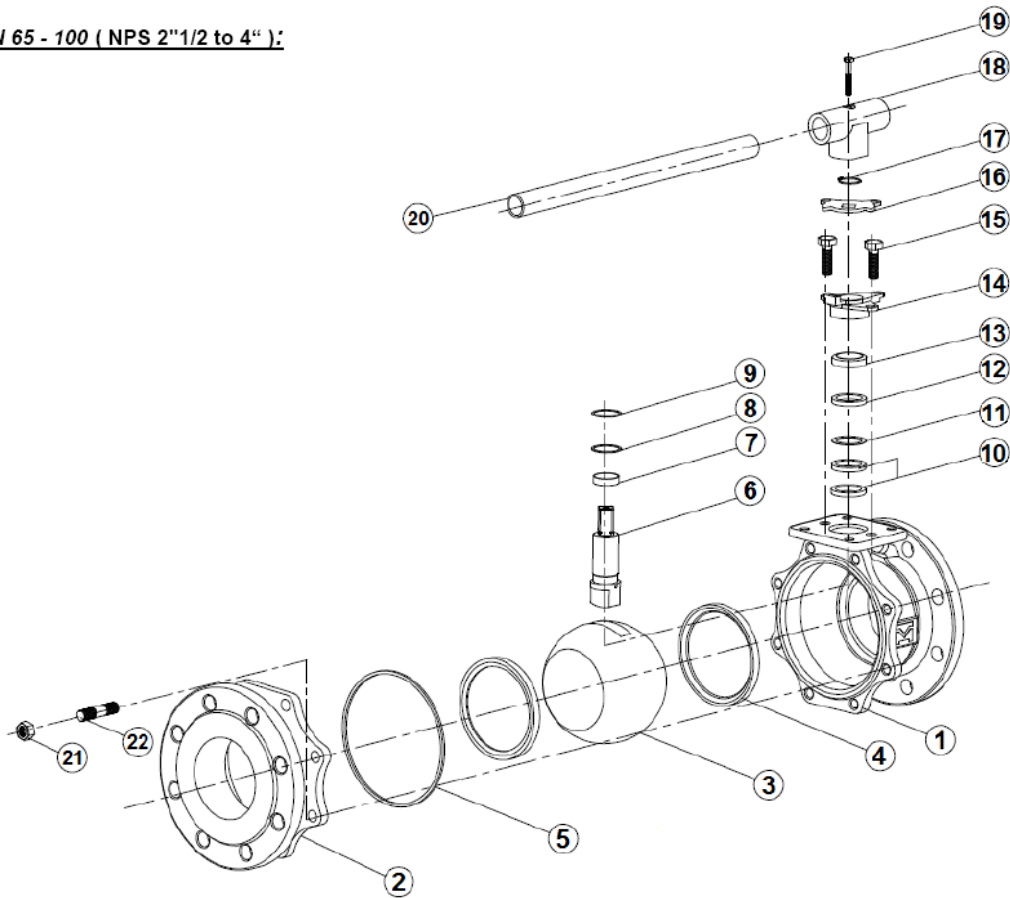


| Item | Designation         | Materials                   |
|------|---------------------|-----------------------------|
| 1    | Body                | ASTM A351 CF8M              |
| 2    | Ends                |                             |
| 3    | Ball                | ASTM A351 CF8M              |
| 4*   | Seat                | PTFE filled with 15% glass  |
| 5*   | Body seal           | Graphite                    |
| 6    | Stem                | ASTM A276 316               |
| 7*   | Ring                | PTFE filled with 25% carbon |
| 8*   | Ring                |                             |
| 9*   | Ring                |                             |
| 10*  | Packing             | Graphite                    |
| 11*  | Packing             | PTFE filled with 25% carbon |
| 12   | Ring                | AISI 304                    |
| 13   | Ring                |                             |
| 14   | Packing gland       | ASTM A351 CF8               |
| 15   | Packing gland screw | AISI 304                    |
| 16   | Pin                 |                             |
| 17   | Circlips            |                             |
| 18   | Handle adaptor      | ASTM A351 CF8               |
| 19   | Screw               | AISI 304                    |
| 20   | Handle              |                             |
| 21   | Nut                 |                             |
| 22   | Stud                |                             |

(\* : included in gaskets kit)

# K85

## K85 111.779 class150 DN1/2" – 4" Ball valve flange ANSI

MATERIALS DN 125 - 200 ( NPS 5" to 8" ):

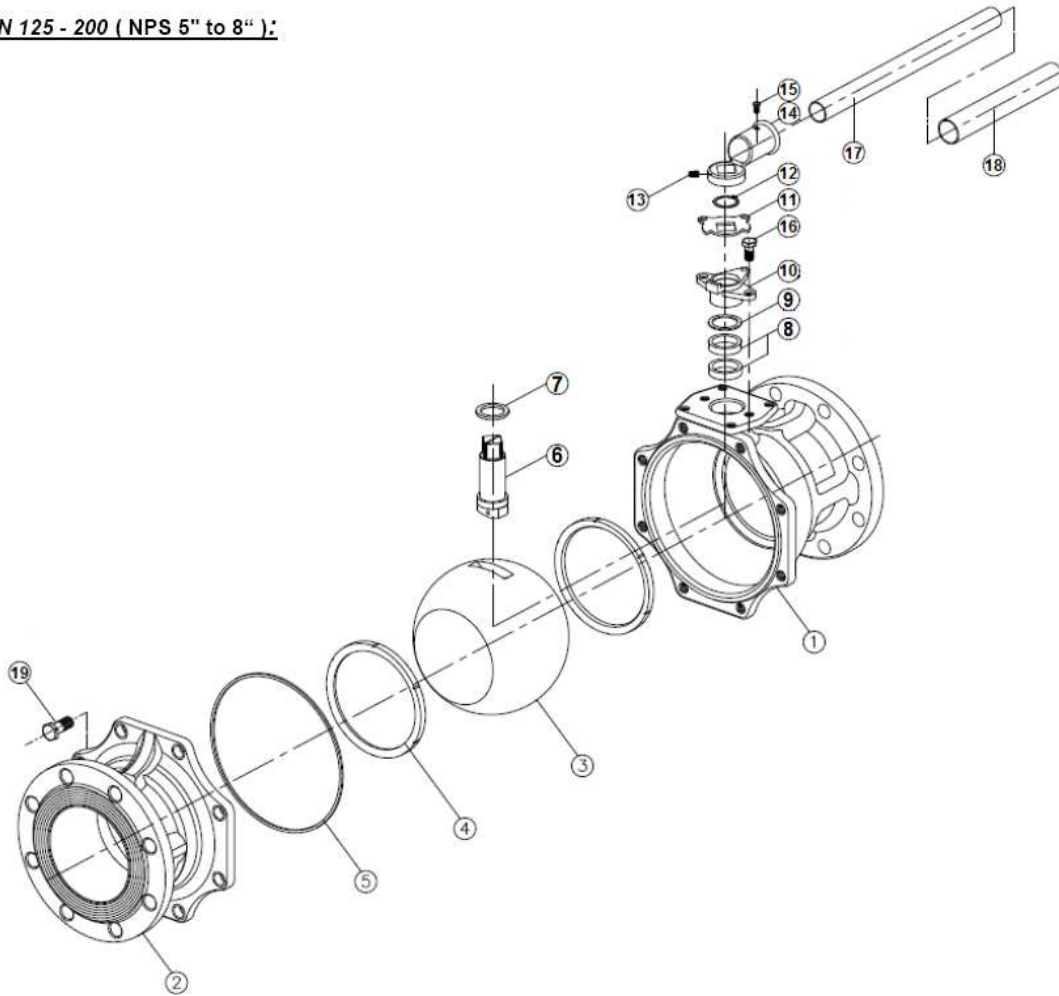

| Item | Designation         | Materials                   |
|------|---------------------|-----------------------------|
| 1    | Body                | ASTM A351 CF8M              |
| 2    | Ends                |                             |
| 3    | Ball                | AISI 316                    |
| 4*   | Seat                | PTFE filled with 15% glass  |
| 5*   | Body seal           | Graphite                    |
| 6    | Stem                | ASTM A276 316               |
| 7*   | Ring                | PTFE filled with 25% carbon |
| 8*   | Packing             | Graphite                    |
| 9*   | Packing             | PTFE filled with 25% carbon |
| 10*  | Packing gland       | ASTM A351 CF8               |
| 11   | Pin                 | AISI 304                    |
| 12   | Circlips            |                             |
| 13   | Screw               |                             |
| 14   | Handle adaptor      |                             |
| 15   | Screw               |                             |
| 16   | Packing gland screw |                             |
| 17   | Handle              | PVC                         |
| 18   | Handle cover        |                             |
| 19   | Body screw          | AISI 304                    |


(\* : included in gaskets kit)

# K85

## K85 111.779 class150 DN1/2" – 4" Ball valve flange ANSI

SIZE DN 15 – 50 ( NPS 1/2" to 2" ) ( in mm ) :

DN 15 – 50 ( NPS 1/2" to 2" )

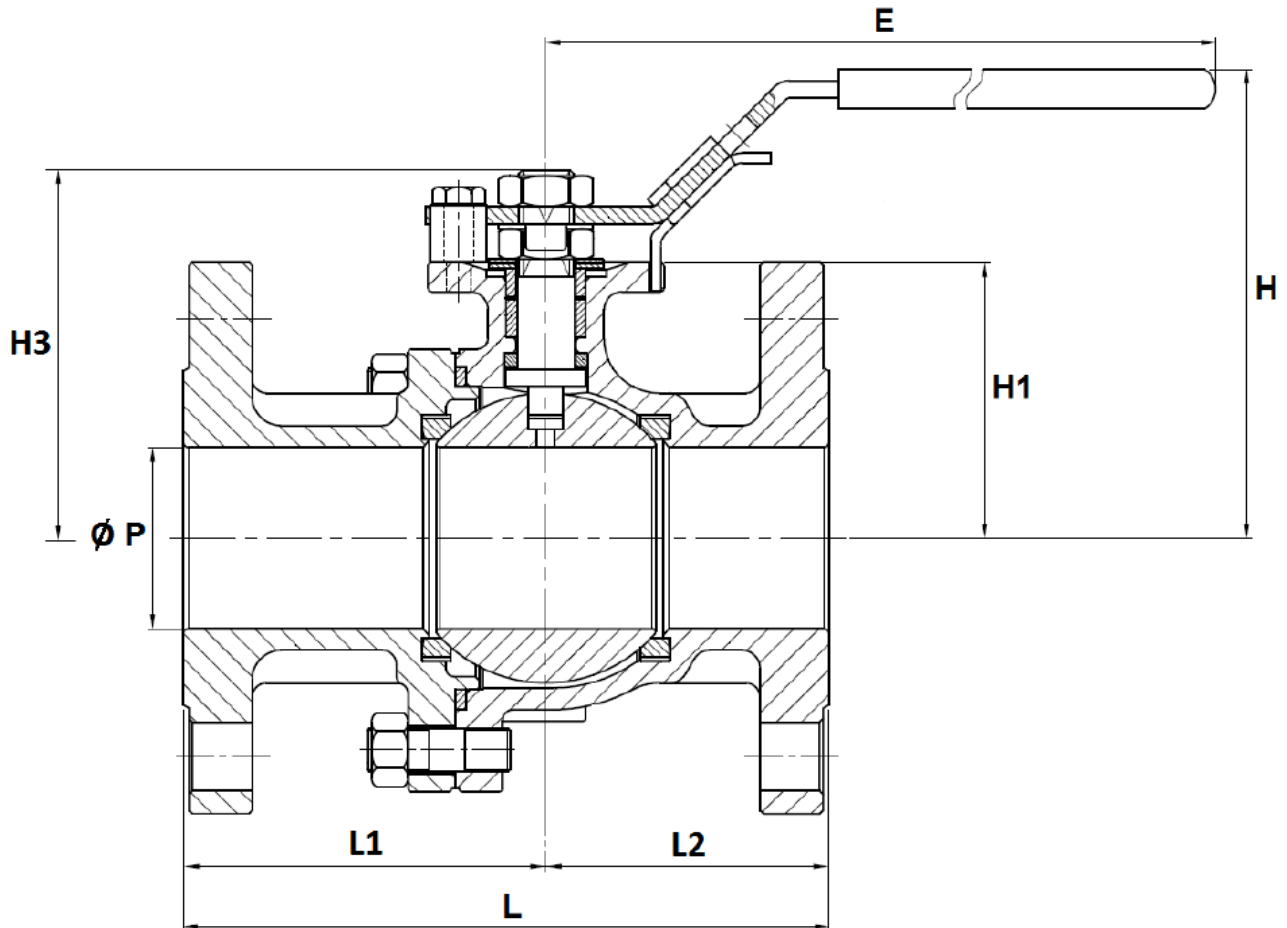


| Ref.        | DN ( mm ) | 15   | 20   | 25   | 32    | 40    | 50    |
|-------------|-----------|------|------|------|-------|-------|-------|
|             | NPS ( " ) | 1/2" | 3/4" | 1"   | 1"1/4 | 1"1/2 | 2"    |
| 779         | Ø P       | 15   | 20   | 24   | 30    | 38    | 50    |
|             | L         | 108  | 117  | 127  | 140.2 | 165   | 178   |
|             | L1        | 61   | 65   | 72.5 | 78.2  | 90.8  | 98    |
|             | L2        | 47   | 52   | 54.5 | 62    | 74.2  | 80    |
|             | E         | 158  | 158  | 196  | 196   | 245   | 261   |
|             | H         | 76.6 | 79.1 | 92   | 96    | 121.1 | 127.6 |
|             | H1        | 39   | 42.5 | 52   | 56    | 66    | 73    |
|             | H3        | 53.5 | 56.5 | 70   | 73    | 88    | 94.5  |
| Weight (Kg) |           | 1.9  | 2.4  | 3.4  | 4.2   | 6.1   | 8.8   |

# K85

## K85 111.779 class150 DN1/2" – 4" Ball valve flange ANSI

SIZE DN 65 - 100 ( NPS 2"1/2 to 4" ) ( in mm ) :

**DN 65 – 100 ( NPS 2"1/2 to 4" )**

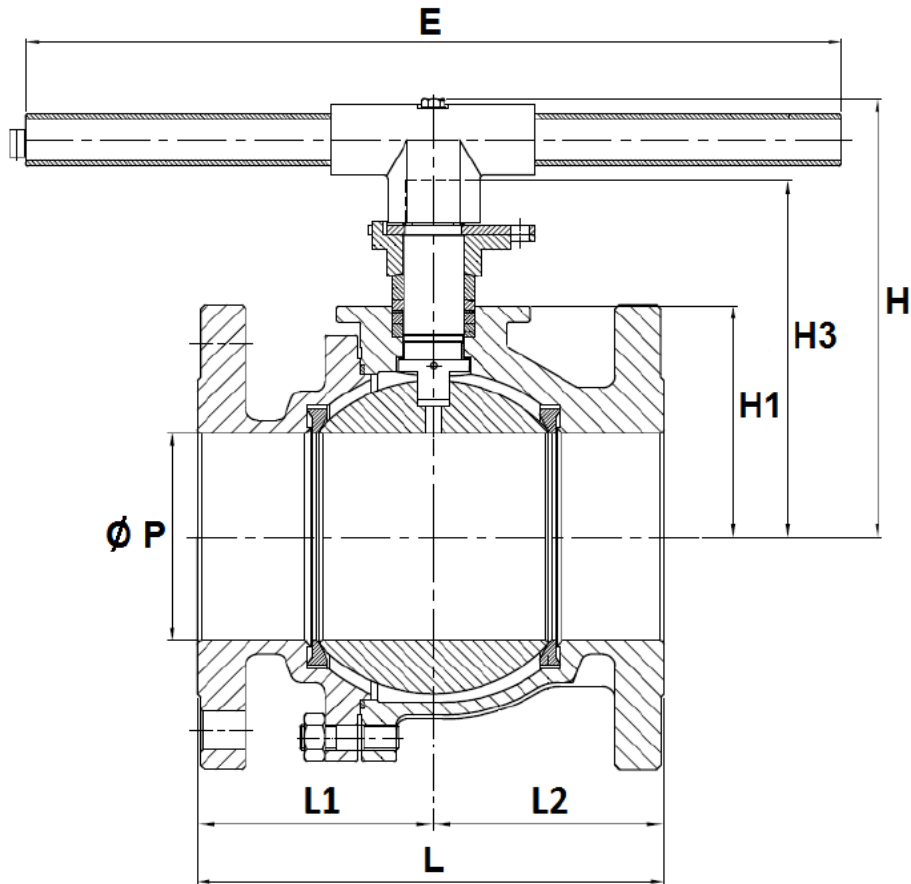


| Ref. | DN (mm )       | 65    | 80    | 100   |
|------|----------------|-------|-------|-------|
|      | NPS ( " )      | 2"1/2 | 3"    | 4"    |
| 779  | Ø P            | 64    | 76    | 98    |
|      | L              | 190   | 203   | 229   |
|      | L1             | 100.3 | 109.2 | 119.3 |
|      | L2             | 89.7  | 93.8  | 109.7 |
|      | E              | 400   | 400   | 400   |
|      | H              | 188   | 194   | 215   |
|      | H1             | 86.5  | 91.5  | 113.5 |
|      | H3             | 152   | 158   | 179   |
|      | Weight (in Kg) | 16.4  | 19.5  | 28.1  |

# K85

## K85 111.779 class150 DN1/2" – 4" Ball valve flange ANSI

SIZE DN 125 - 200 ( NPS 5" to 8" ) ( in mm ) :

DN 125 – 200 ( NPS 5" to 8" )

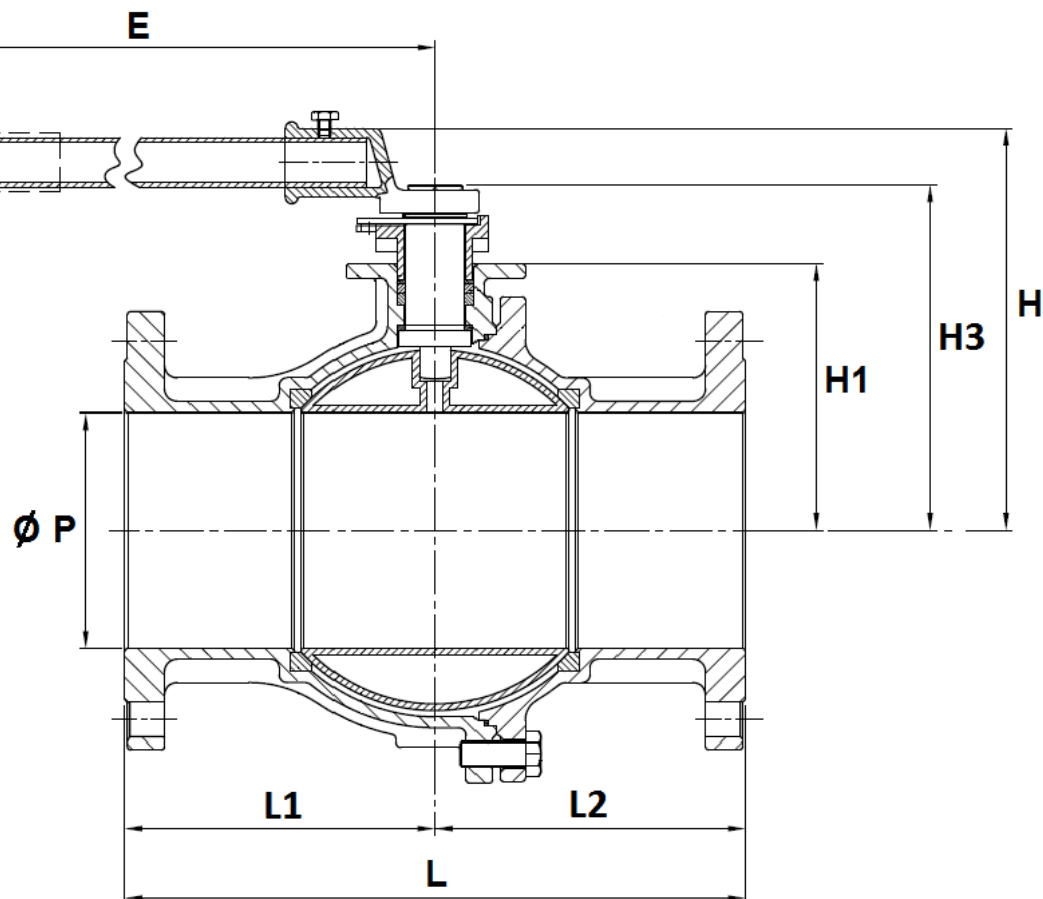


| Ref. | DN             | 125   | 150   | 200   |
|------|----------------|-------|-------|-------|
|      | NPS ( " )      | 5"    | 6"    | 8"    |
| 779  | Ø P            | 125   | 150   | 200   |
|      | L              | 356   | 394   | 457   |
|      | L1             | 176.7 | 197   | 226   |
|      | L2             | 179.3 | 197   | 231   |
|      | E              | 743   | 743   | 840   |
|      | H              | 239.6 | 256.5 | 334   |
|      | H1             | 147   | 170   | 215   |
|      | H3             | 199   | 220   | 300.5 |
|      | Weight (in Kg) | 40    | 54    | 88    |



# K85

K85 111.779 class150 DN1/2" – 4"  
Ball valve flange ANSI

GEARBOX SIZE ( in mm ) :

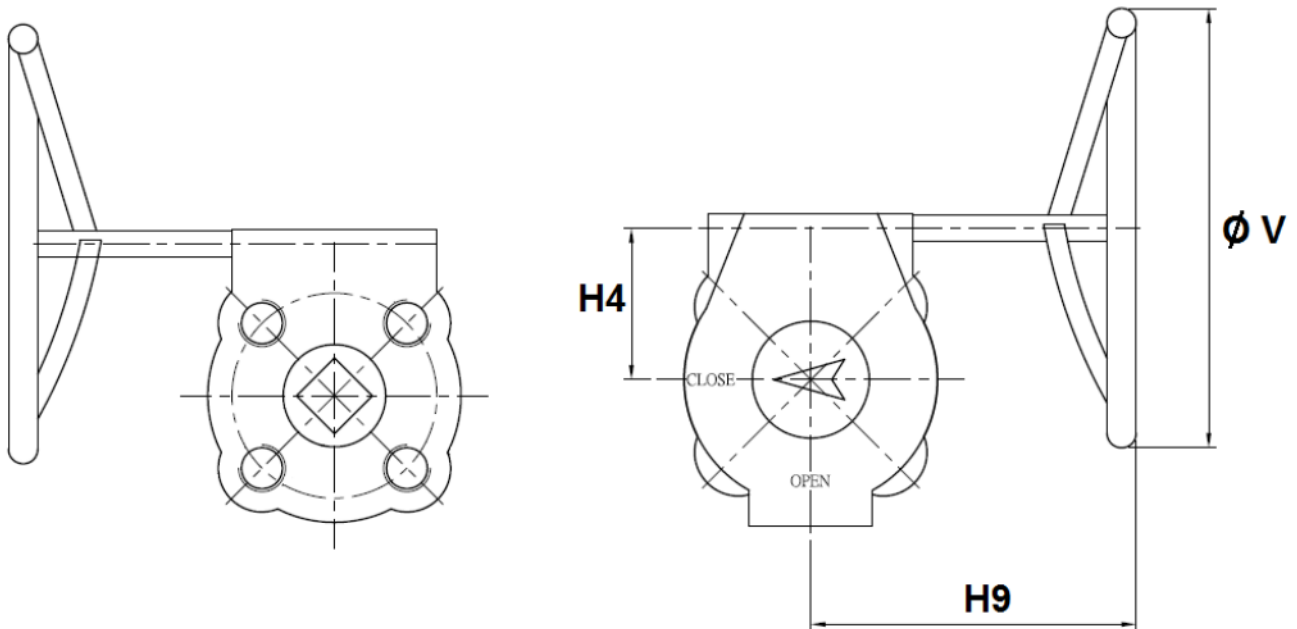

| DN ( mm )     | 150     | 200     |
|---------------|---------|---------|
| NPS ( " )     | 6"      | 8"      |
| H4            | 63      | 78      |
| H9            | 238     | 226     |
| Ø V           | 300     | 300     |
| Weight ( Kg ) | 12.5    | 15      |
| Ref.          | 9830296 | 9830297 |

# K85

## K85 111.779 class150 DN1/2" – 4" Ball valve flange ANSI

ISO MOUNTING PAD AND STEM SIZE ( in mm ) :

DN 15 – 50







DN 65 – 100

DN 125 - 200

NPS ( 1/2" - 2" )

NPS ( 2"1/2 - 4" )

NPS ( 5" - 8" )

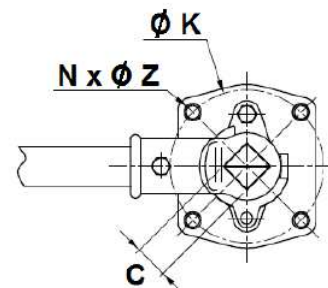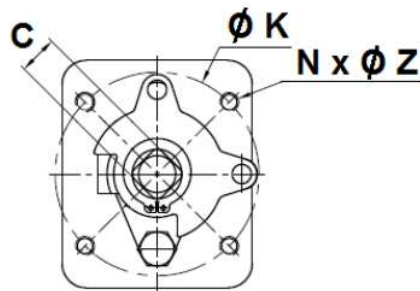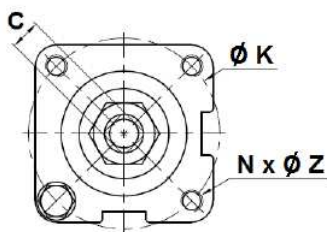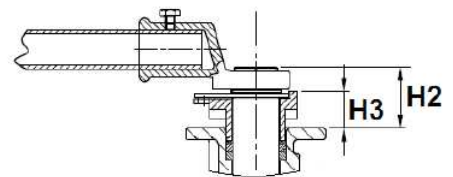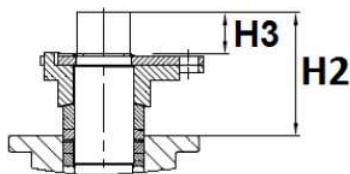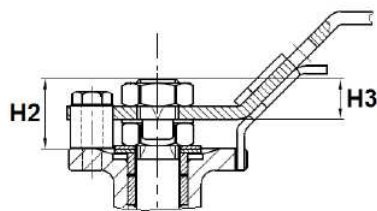


| Ref. | DN (mm)   | 15   | 20   | 25   | 32    | 40    | 50   | 65    | 80    | 100   | 125   | 150   | 200   |
|------|-----------|------|------|------|-------|-------|------|-------|-------|-------|-------|-------|-------|
|      | NPS ( " ) | 1/2" | 3/4" | 1"   | 1"1/4 | 1"1/2 | 2"   | 2"1/2 | 3"    | 4"    | 5"    | 6"    | 8"    |
| 779  | C         | 9    | 9    | 11   | 11    | 14    | 14   | 17    | 17    | 17    | 27    | 27    | 36    |
|      | Ø K       | 42   | 42   | 50   | 50    | 70    | 70   | 102   | 102   | 102   | 125   | 125   | 140   |
|      | ISO       | F04  | F04  | F05  | F05   | F07   | F07  | F10   | F10   | F10   | F12   | F12   | F14   |
|      | N x Ø Z   | 4xM5 | 4xM5 | 4xM6 | 4xM6  | 4xM8  | 4xM8 | 4xM10 | 4xM10 | 4xM10 | 4xM12 | 4xM12 | 4xM16 |
|      | H2        | 14.5 | 14   | 18   | 17    | 22    | 21.5 | 65.5  | 66.5  | 65.5  | 52    | 50    | 85.5  |
|      | H3        | 8.5  | 8.5  | 12   | 12    | 14    | 14   | 27    | 27    | 27    | 19    | 19    | 43.5  |

# K85

## K85 111.779 class150 DN1/2" – 4" Ball valve flange ANSI

CLASS 150 (PN20) FLANGES SIZE ( in mm ) :

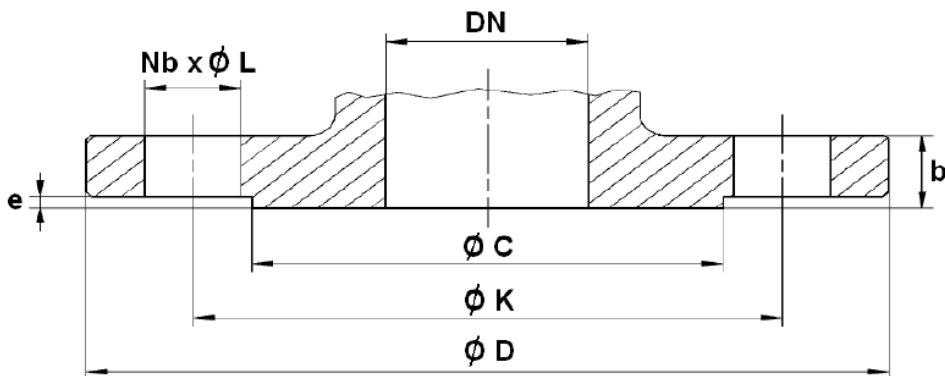

| Ref. | DN (mm)                   | 15       | 20       | 25       | 32       | 40       | 50     | 65     | 80     | 100    | 125    | 150    | 200      |
|------|---------------------------|----------|----------|----------|----------|----------|--------|--------|--------|--------|--------|--------|----------|
|      | NPS ( " )                 | 1/2"     | 3/4"     | 1"       | 1 1/4"   | 1 1/2"   | 2"     | 2 1/2" | 3"     | 4"     | 5"     | 6"     | 8"       |
| 779  | $\varnothing C$           | 35       | 42.9     | 50.8     | 63.5     | 73       | 92.1   | 104.8  | 127    | 157.2  | 186    | 216    | 270      |
|      | $\varnothing D$           | 90       | 100      | 110      | 115      | 125      | 150    | 180    | 190    | 230    | 254    | 279    | 343      |
|      | $\varnothing K$           | 60.3     | 69.9     | 79.4     | 88.9     | 98.4     | 120.7  | 139.7  | 152.4  | 190.5  | 216    | 241.5  | 298.5    |
|      | $Nb \times \varnothing L$ | 4 x 15.8 | 4 x 15.8 | 4 x 15.8 | 4 x 15.8 | 4 x 15.8 | 4 x 19 | 4 x 19 | 4 x 19 | 8 x 19 | 8 x 22 | 8 x 22 | 8 x 22.5 |
|      | b                         | 11.2     | 12.7     | 14.3     | 15.9     | 17.5     | 19     | 22.3   | 23.9   | 23.9   | 23.9   | 25.4   | 28.6     |
| e    | 1.6                       | 1.6      | 1.6      | 1.6      | 1.6      | 1.6      | 1.6    | 1.6    | 1.6    | 1.6    | 1.6    | 1.6    |          |

### FLOW COEFFICIENT Kvs ( M3 / h ) :

| DN           | 15   | 20   | 25 | 32    | 40    | 50  | 65    | 80  | 100  | 125  | 150  | 200  |
|--------------|------|------|----|-------|-------|-----|-------|-----|------|------|------|------|
| NPS ( " )    | 1/2" | 3/4" | 1" | 1"1/4 | 1"1/2 | 2"  | 2"1/2 | 3"  | 4"   | 5"   | 6"   | 8"   |
| Kvs ( m3/h ) | 31   | 58   | 86 | 139   | 229   | 415 | 698   | 983 | 1686 | 2824 | 3953 | 7225 |

### TORQUE VALUES ( in Nm without safety coefficient ) :

| DN (mm)       | 15   | 20   | 25 | 32    | 40    | 50 | 65    | 80 | 100 | 125 | 150 | 200 |
|---------------|------|------|----|-------|-------|----|-------|----|-----|-----|-----|-----|
| NPS ( " )     | 1/2" | 3/4" | 1" | 1"1/4 | 1"1/2 | 2" | 2"1/2 | 3" | 4"  | 5"  | 6"  | 8"  |
| Torque ( Nm ) | 8    | 10   | 12 | 20    | 30    | 40 | 60    | 90 | 130 | 160 | 250 | 500 |

### GEARBOX SPECIFICATIONS :

|                      |         |         |
|----------------------|---------|---------|
| DN ( mm )            | 150     | 200     |
| NPS ( " )            | 6"      | 8"      |
| Ref.                 | 9830296 | 9830297 |
| Ratio factor         | 30 :1   | 50 :1   |
| Output torque ( Nm ) | 700     | 1200    |

### STANDARDS :

- Fabrication according to ISO 9001 : 2008
- DIRECTIVE 97/23/CE : CE N° 0035  
Risk Category III Module H
- Construction according to ASME B16.34
- Pressure tests according to API 598, table 6
- Class 150 (PN20) R.F. flanges according to ASME B16.5
- ISO 5211 mounting pad
- Length according to ASME B16.10 ( EN 558 series 3 up to DN100, series 12 from DN125 to 200 )
- ATEX Group II Category 2 G/2D Zone 1 & 21 Zone 2 & 22 ( optional marking )
- Fire safe according to API 607 5° edition up to DN100, 4° edition from DN125 to DN150

## **INSTALLATION INSTRUCTIONS**

### **GENERAL GUIDELINES :**

- Ensure that the valves to be used are appropriate for the conditions of the installation (type of fluid, pressure and temperature).
- Be sure to have enough valves to be able to isolate the sections of piping as well as the appropriate equipment for maintenance and repair.
- Ensure that the valves to be installed are of correct strength to be able to support the capacity of their usage.
- **Installation of all circuits should ensure that their function can be automatically tested on a regular basis (at least two times a year).**

### **INSTALLATION INSTRUCTIONS :**

- **Before installing the valves, clean and remove any objects from the pipes (in particular bits of sealing and metal) which could obstruct and block the valves.**
- **Ensure that both connecting pipes either side of the valve (upstream and downstream) are aligned (if they're not, the valves may not work correctly).**
- **Make sure that the two sections of the pipe (upstream and downstream) match, the valve unit will not absorb any gaps. Any distortions in the pipes may affect the tightness of the connection, the working of the valve and can even cause a rupture. To be sure, place the kit in position to ensure the assembling will work.**
- **If sections of piping do not have their final support in place, they should be temporarily fixed. This is to avoid unnecessary strain on the valve.**
- Tighten the bolts in cross.
- It's recommended to operate the valve ( open and close ) 1 to 2 times per year