

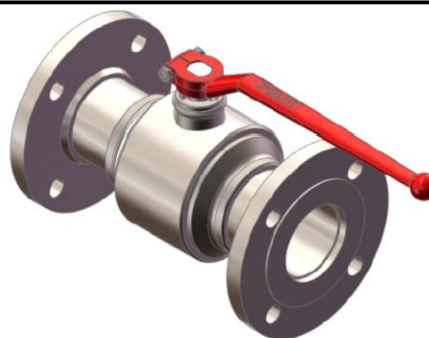



BALL VALVE KPV, FLANGED FULL BORE, DN65–DN400

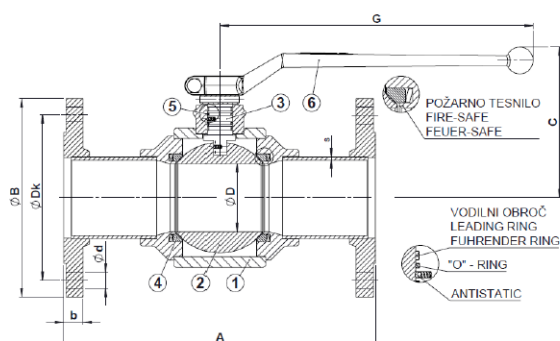

DN65–DN125

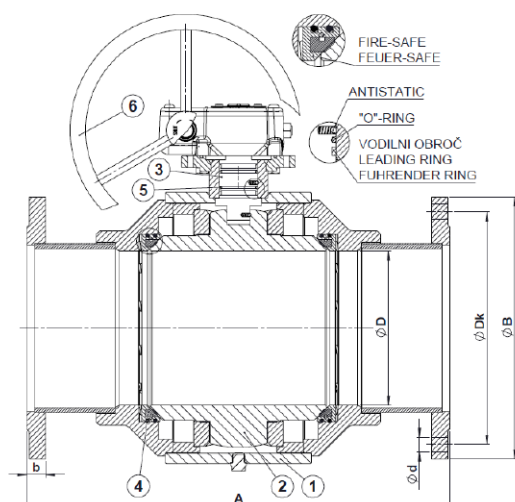

DN150–DN300

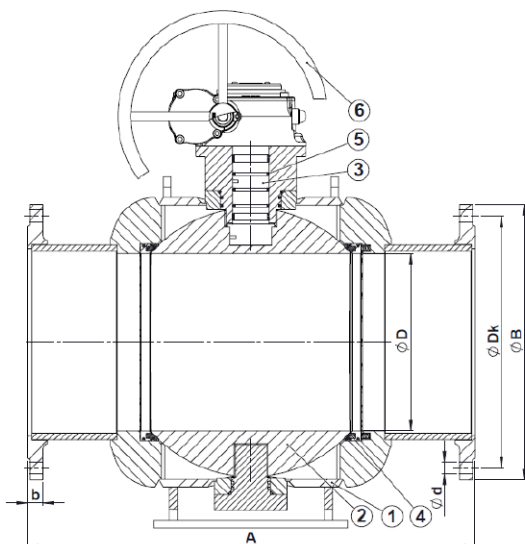

DN350–DN400



Materials

1	Body	Carbon Steel – A105, P235TR2
2	Ball	Stainless Steel – X5CrNi18-10 (A304)
3	Stem	Stainless Steel – X30Cr13 (A420)
4	Seats	PTFE**
5	O-Ring	PTFE + EPDM
6	Handle	Forged Aluminium – Al6061, option S235JR (St 37-2)

KPV

Working temperature: -20 °C/+200 °C (Temperature below -20 °C contact manufacturer)

KPV DN ... PN40 DP PX PX

PN40

Art. nr.	DN	A	B	C	ØD	G	b	ØDk	Ød	Nr.	Weight (kg)
A905035	65	290	185	160	63,5	293	22	145	18	8	16,50
A905036	80	310	200	170	78	293	24	160	18	8	20,50
A905037	100	350	235	185	99	415	24	190	22	8	32,00
A905038	125	400	270	260	124	1000	26	220	26	8	57,00
A905039	150	450	300	277	149	1000	28	250	26	8	80,00
A905040	200	550	375	–	200	–	34	320	30	12	147,00
A905041	250/200*	450	450	–	200	–	38	385	33	12	159,00
A905046	250	650	450	–	250	–	38	385	33	12	283,50
A905047	300	750	515	–	300	–	42	450	33	16	430,50
A905048	350	850	580	–	334	–	46	510	36	16	637,60
A905049	400	950	660	–	387	–	50	585	39	16	900,50

 TRUNION MOUNTED BALL

Opombe

Face to face dimensions conform to DIN3202 F17. DN50 to DN400 with spring loaded washers.

DN150 to DN400 are with the manual gearbox.

Antistatic and fire safe design.

*DN250 – reduced bore.

**DN150 – DN400 have seals with 15% graphite.