

D71

D71 118 516.236 PN16 DN15-DN200

Cast iron y strainer high temperature

CAST IRON Y STRAINER HIGH TEMPERATURE PN16 FLANGES DIN 3202-1 F1

Cast iron Y strainer flanged PN16 for filtration of high temperature network, hot water, steam, compressed air, water treatment and irrigation.

Strainer with removable filter and bolted bonnet

Threaded BSP draining cap allowing to install a draining valve.

Certificate
3.1

LRQA
PED/2014/68/UE



Size : DN15 to DN200
Connection : Flanges RF PN10/16
Min Temperature : -10°C
Max Temperature : +300°C
Max Pressure : 16 Bars
Specifications : Removable stainless steel filter
Bolted bonnet with draining cap
High temperature

Materials : Cast iron EN GJL-250

D71

D71 118 516.236 PN16 DN15-DN200

Cast iron y strainer high temperature

CAST IRON Y STRAINER HIGH TEMPERATURE PN16 FLANGES DIN 3202-1 F1


SPECIFICATIONS :

- Stainless steel removable filter
- Flanges R.F. PN10/16 up to DN150 , PN16 for DN200
- Horizontal or vertical position with descendant fluid (respect the flow direction indicated by the arrow)
- Mesh 1mm up to DN 50 , 1.25 mm from DN 65 to 80 and 1.6 mm over
- Bolted bonnet with draining cap threaded BSP
- Blue RAL 5002 painting, 100 µm thickness

USE :

- High temperature, hot water, steam, compressed air, water treatment and irrigation
- Min Temperature Ts : - 10°C
- Max Temperature Ts :+ 300°C
- Max Pressure Ps : 16 bars (see graph)
- **Steam : 10 bars max.**

PRESSURE / TEMPERATURE GRAPH (STEAM EXCLUDED) :

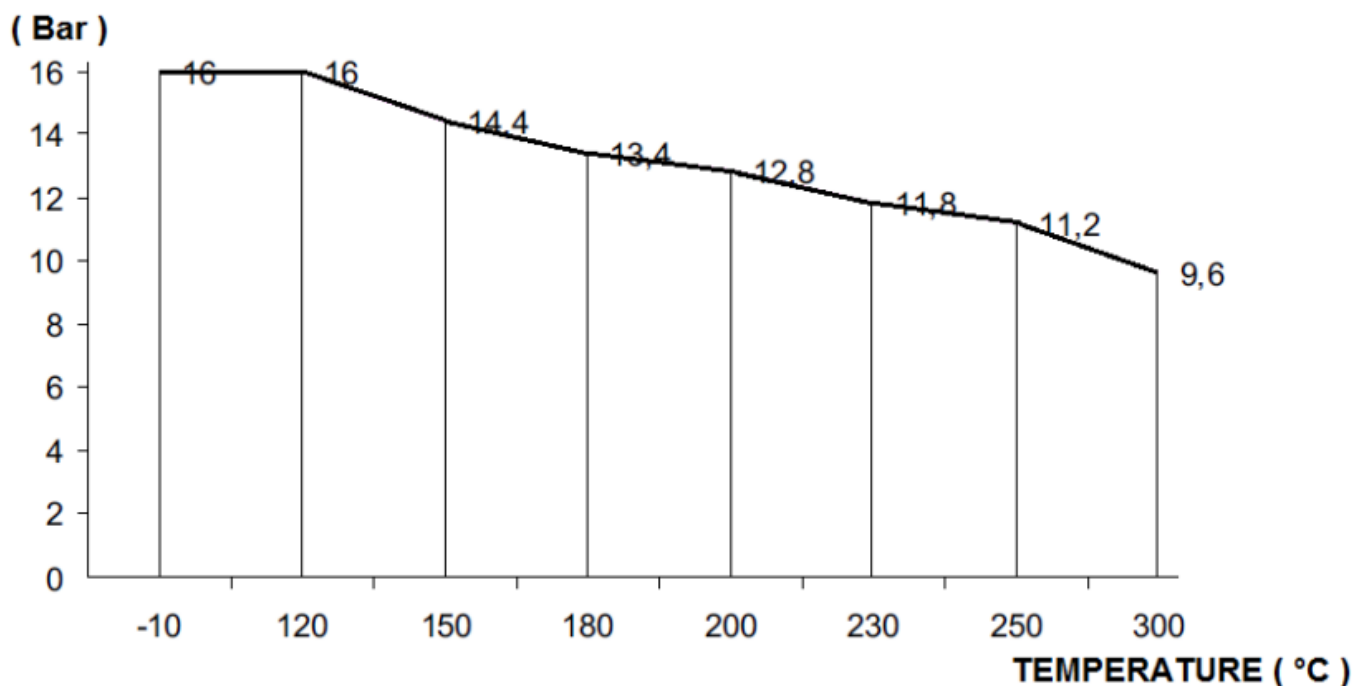

FLOW COEFFICIENT Kvs (M3 / h) :

DN	15	20	25	32	40	50	65	80	100	125	150	200
Kvs (m3/h)	6.3	11.2	14.7	23.7	37.7	57.9	101.5	147.4	209.6	326.2	403	707


D71

D71 118 516.236 PN16 DN15-DN200

Cast iron y strainer high temperature

CAST IRON Y STRAINER HIGH TEMPERATURE PN16 FLANGES DIN 3202-1 F1

HEAD LOSS GRAPH :

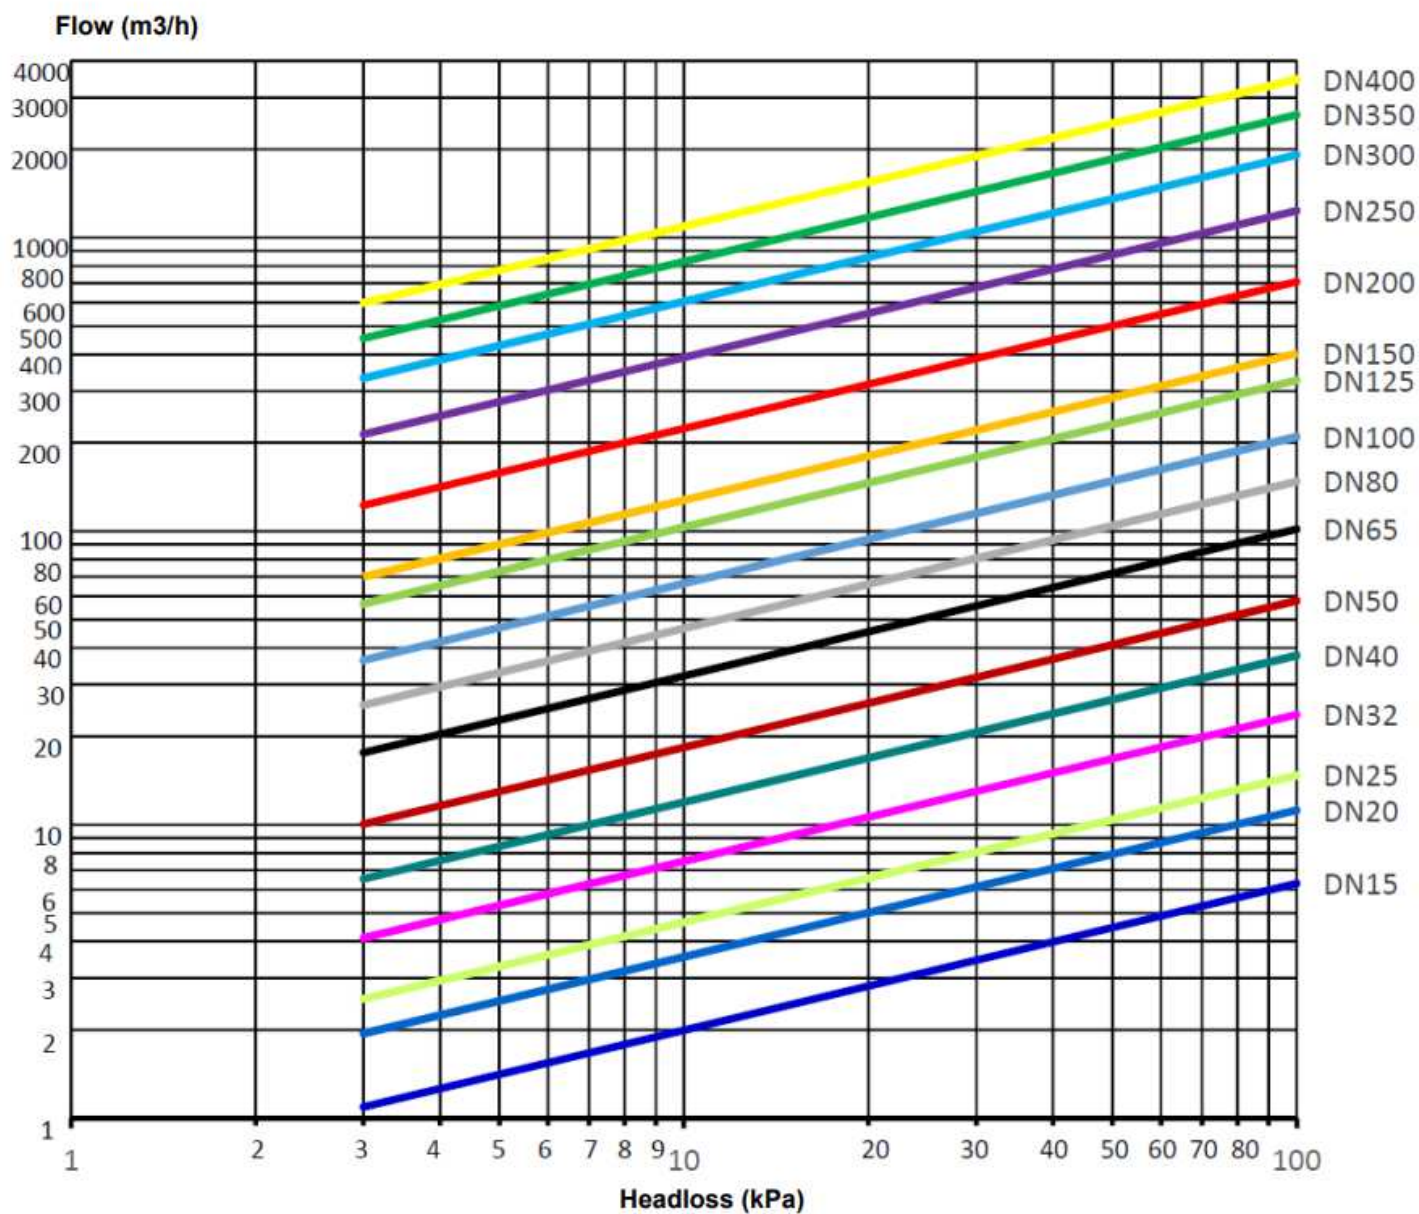

D71

D71 118 516.236 PN16 DN15-DN200


Cast iron y strainer high temperature

CAST IRON Y STRAINER HIGH TEMPERATURE PN16 FLANGES DIN 3202-1 F1


RANGE :

- Cast iron strainer flanged R. F. PN10/16 from DN 15 to DN 150 and PN16 for DN200 **Ref.236**

REPAIRABILITY :

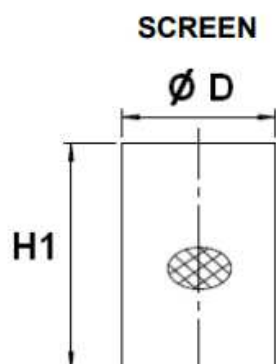

GRAPHITE BONNET GASKET

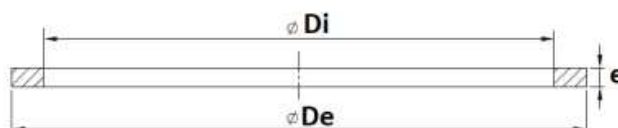

	DN	15	20	25	32	40	50
Screen	Ø D	23	28	36	42	50	61.5
	H1	56	68	82	98	114	119
	Mesh	1					
	Ref.	9801130	9801131	9801132	9801133	9801134	9801135
Bonnet gasket	Ø Di	36	36	46	56	68	75
	Ø De	46	46	56	68	79	87
	e	1					
	Ref.	9801150	9801151	9801152	9801153	9801154	9801155

	DN	65	80	100	125	150	200
Screen	Ø D	78.5	89.5	109.5	137.5	160	210
	H1	134	149	169	199	224	284
	Mesh	1.25		1.6			
	Ref.	9801136	9801137	9801138	9801139	9801140	9801141
Bonnet gasket	Ø Di	90	110	120	151	175	245
	Ø De	102	122	135	170	195	270
	e	1					
	Ref.	9801156	9801157	9801158	9801159	9801160	9801991


D71

D71 118 516.236 PN16 DN15-DN200

Cast iron y strainer high temperature

CAST IRON Y STRAINER HIGH TEMPERATURE PN16 FLANGES DIN 3202-1 F1

MATERIALS :

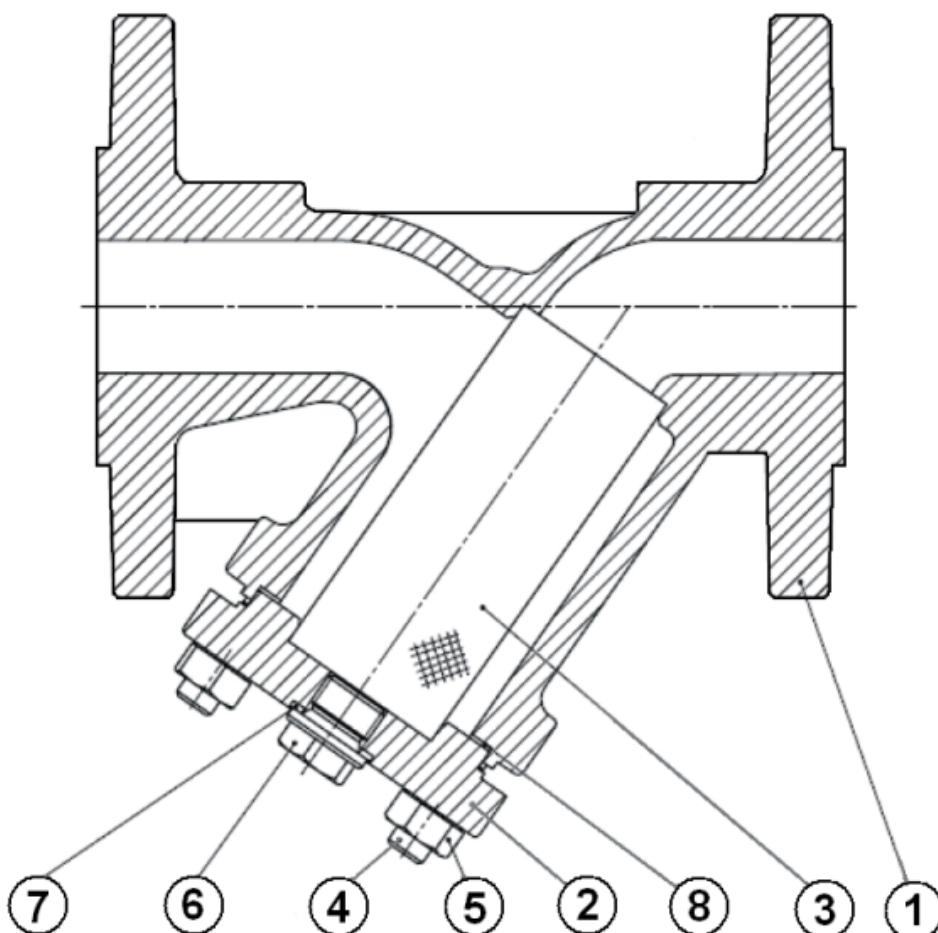

Item	Designation	Materials
1	Body	Cast iron EN GJL-250
2	Bonnet	
3	Filter	ASTM A182 F 304
4	Studs	Steel 8.8-A2A
5	Nut	Steel 8-A2A
6	Draining cap	Steel C35E
7	Draining gasket	Steel A4 1.4571
8	Bonnet gasket	Graphite


D71

D71 118 516.236 PN16 DN15-DN200


Cast iron y strainer high temperature

CAST IRON Y STRAINER HIGH TEMPERATURE PN16 FLANGES DIN 3202-1 F1

SIZE (in mm) :

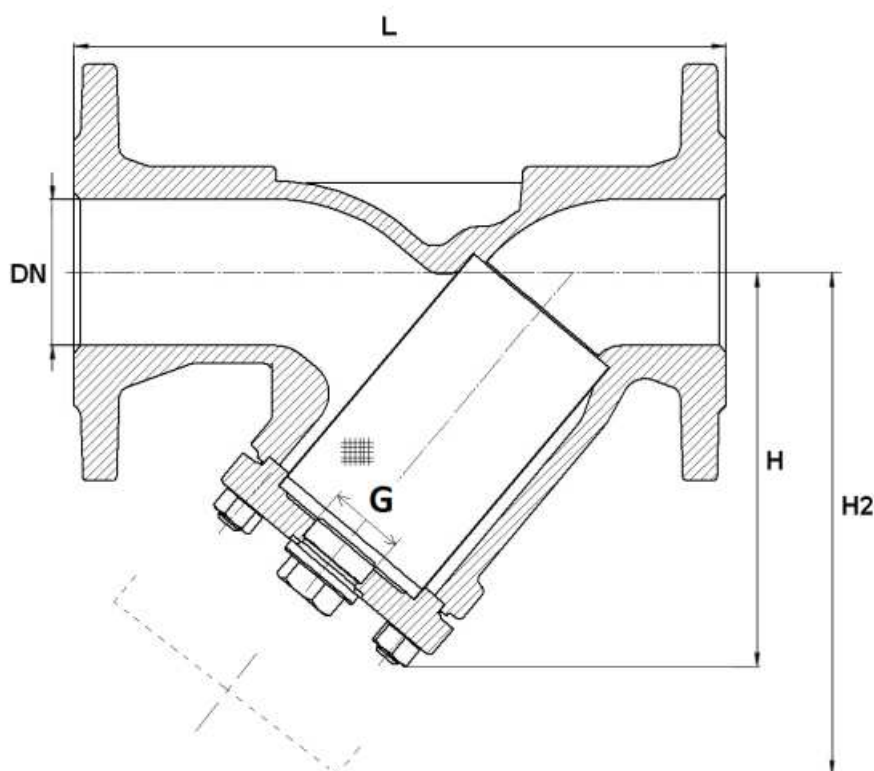

Filter size :

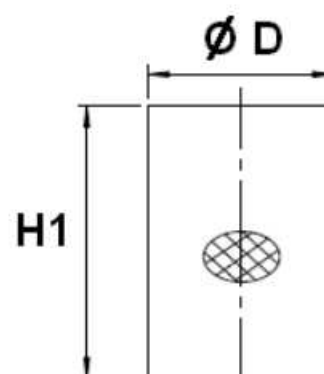

DN	15	20	25	32	40	50	65	80	100	125	150	200
L	130	150	160	180	200	230	290	310	350	400	480	600
H	90	100	115	135	150	160	180	215	240	280	330	405
H2	135	160	180	215	240	250	285	330	395	455	525	650
G (drain)	3/8"		3/4"		1"				1"1/2			
Ø D	23	28	36	42	50	61.5	78.5	89.5	109.5	137.5	160	210
H1	56	68	82	98	114	119	134	149	169	199	224	284
Mesh	1						1.25		1.6			
Weight (Kg)	2.6	3	4.3	6.8	8.8	11	14.6	18.6	27	38.5	54.5	110
Ref.	236015	236020	236025	236032	236040	236050	236065	236080	236100	236125	236150	236200


D71

D71 118 516.236 PN16 DN15-DN200

Cast iron y strainer high temperature

CAST IRON Y STRAINER HIGH TEMPERATURE PN16 FLANGES DIN 3202-1 F1

FLANGES SIZE (in mm) :

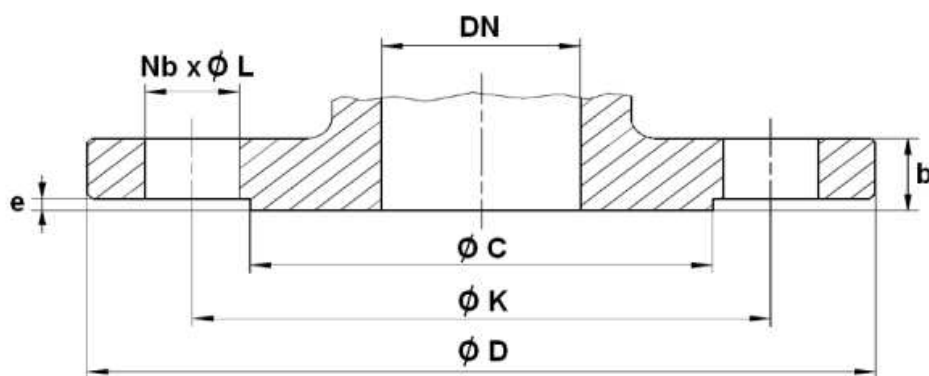

DN	15	20	25	32	40	50	65	80	100	125	150	200
Ø C	46	56	65	76	84	99	118	132	156	184	211	266
Ø D	95	105	115	140	150	165	185	200	220	250	285	340
Ø K	65	75	85	100	110	125	145	160	180	210	240	295
Nb x Ø L	4 x 14	4 x 14	4 x 14	4 x 19	4 x 19	4 x 19	4 x 19	8 x 19	8 x 19	8 x 19	8 x 23	12 x 23
b	16	18	18	18	18	20	18	20	20	22	22	24
e	2	2	2	2	2	2	2	2	2	2	2	2

CAST IRON Y STRAINER HIGH TEMPERATURE PN16 FLANGES DIN 3202-1 F1

STANDARDS :

- Manufacturer certified ISO 9001 : 2015 and ISO 14001 :2015
- DIRECTIVE 2014/68/EU : For liquids and gas of Group 1
 - DN15-25 : Article 4, §3 (SEP), no CE marking
 - DN32-50 : Risk Category I, marking CE
 - DN65-200 : Risk Category II, marking CE0062 or CE0343
- Certificate 3.1 on request
- Test according to EN 12266-1
- Length according to EN 558 Series 1 (DIN 3202 F1 – NF 29354)
- Flanges R.F. according to EN 1092-2 PN16
- Russian certification TRCU (marking and declaration EAC on request)

INSTALLATION POSITIONS :

Vertical position (descendand fluid)

Horizontal position

