



L10

L10 117 516.11 PN16 DN50-DN1000_F1 (F6)
Check valve flange (option PN25, PN40)

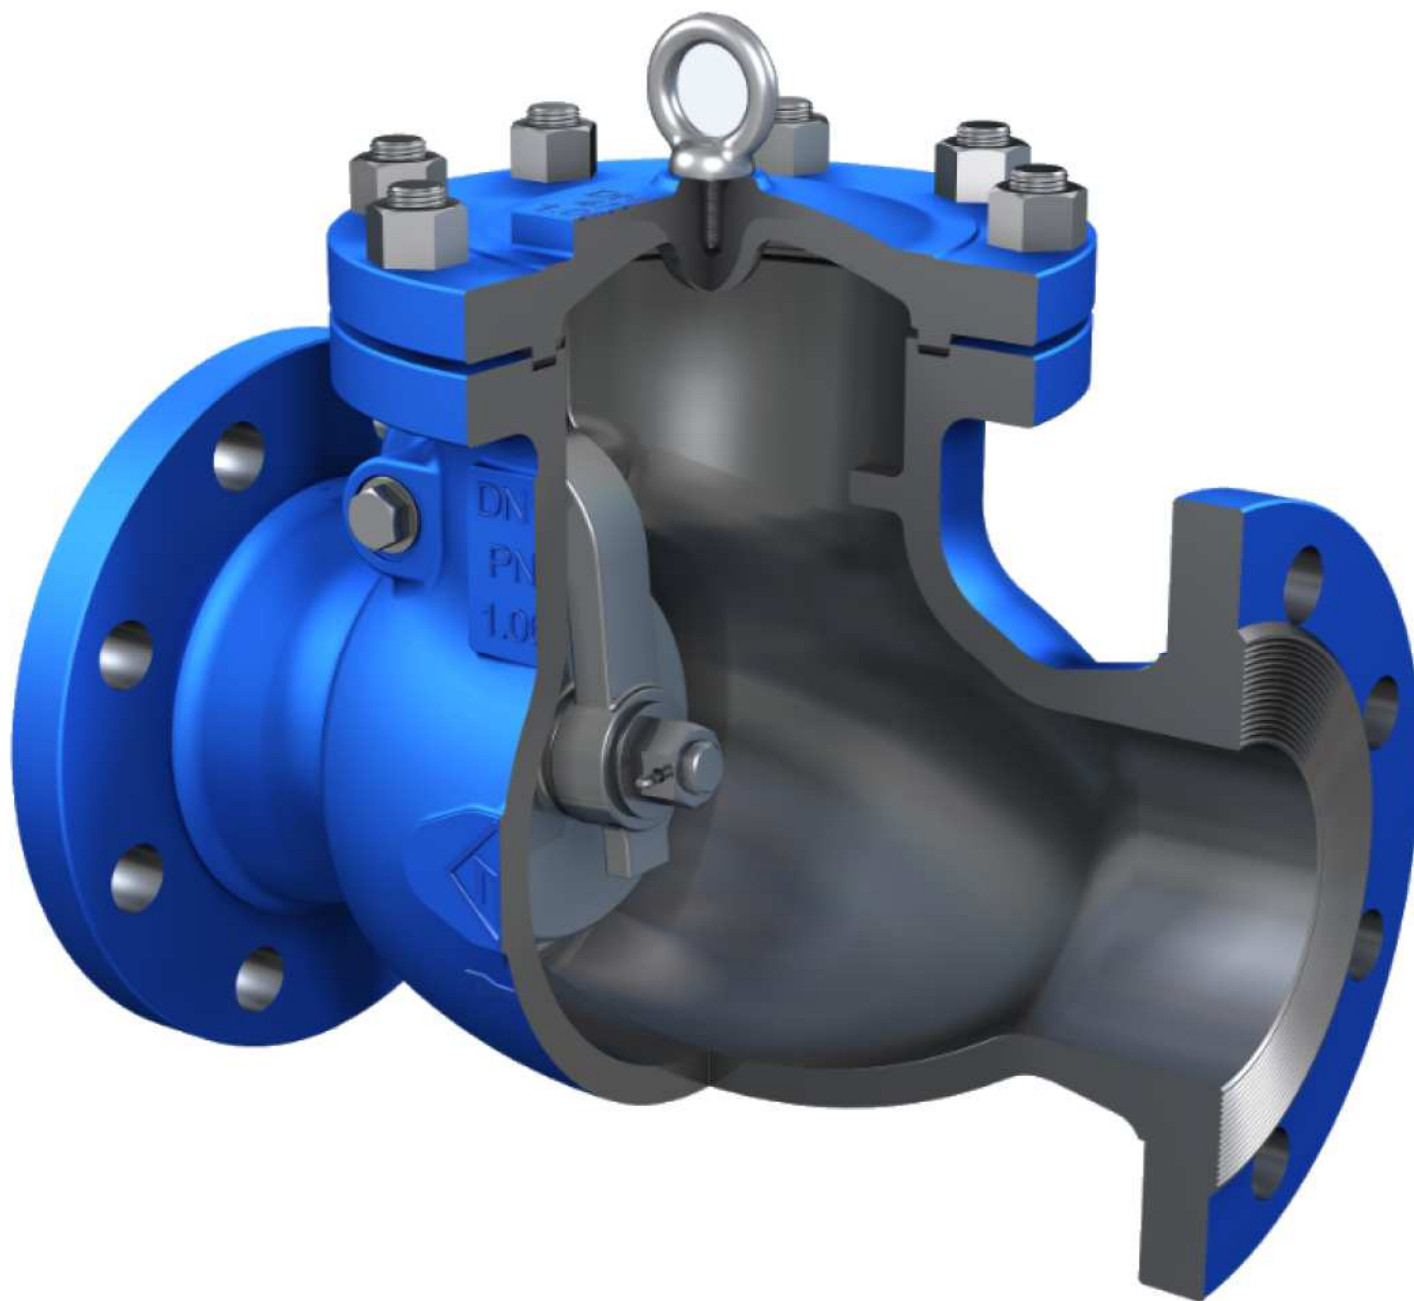

L10

L10 117 516.11 PN16 DN50-DN1000_F1 (F6) Check valve flange (option PN25, PN40)

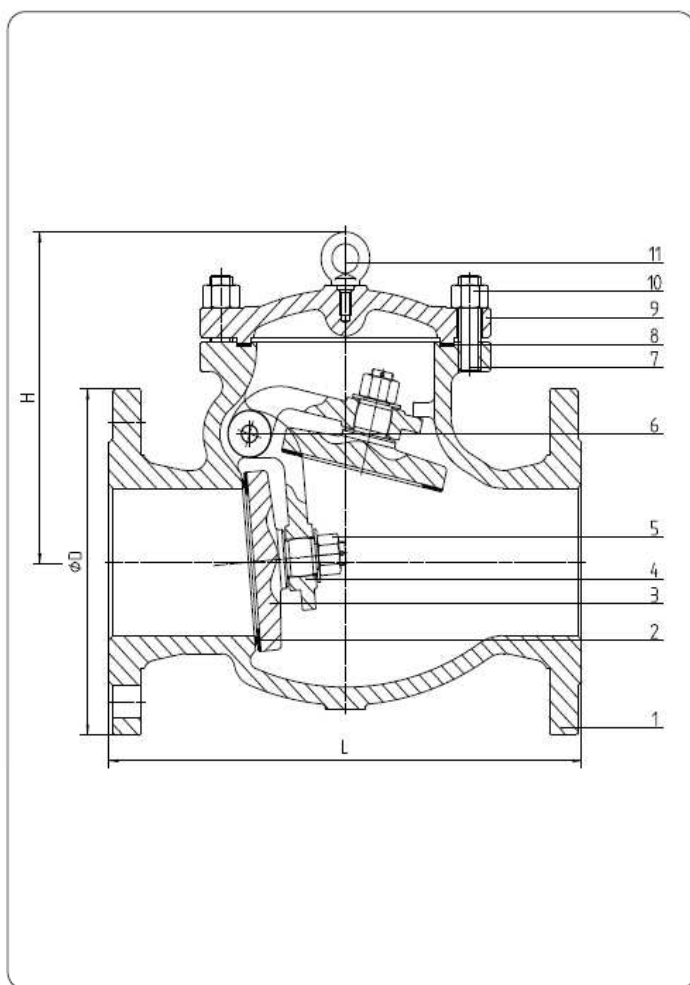

standard features

- **Description** BOLTED COVER
FULL OPEN
- **Design** BS EN 14341
DIN 3840
- **Face to face** BS EN 558-1 S.48
BS EN 558-1 S.1
- **Flanges** BS EN 1092
BW TO BS EN 12627
- **Testing** BS EN 12266-A
- **Rating** BS EN 12516
- **Marking** EN 19
CE - PED
- **Certificates** EN 10204 – 3.1 B

PART NAME	MATERIAL		
1. Body	1.0619	1.4308	1.4408
2.Seat Surface	Overlay X20Cr13	1.4308	1.4408
3.Disc Seat Surface	X20Cr13	1.4308	1.4408
4.Arm	1.0619	1.4308	1.4408
5.Hexagon Nut	SS304	SS304	SS316
6.Pin	SS304	SS304	SS316
7.Bolts	ASTM A193 B7	ASTM A193 B8	ASTM A193 B8
8.Gasket	SS304+Graphite	SS304+Graphite	SS316+Graphite
9.Cover	1.0619	1.4308	1.4408
10.Hexagon Nut	ASTM A194 2H	ASTM A194 8	ASTM A194 8
11.Eye Bolt	C.S Gr8.8	C.S Gr8.8	C.S Gr8.8

L10

L10 117 516.11 PN16 DN50-DN1000_F1 (F6) Check valve flange (option PN25, PN40)

L10 117 516.11 SWING CHECK VALVES DIN PN16 Face to Face F6

SIZE DN	50	65	80	100	125	150	200	250	300	350	400	500	600	700	800	900	1000
L RF/BW	200	240	260	300	350	400	500	600	700	800	900	1100	1300	1500	1700	1900	2100
D	165	185	200	220	250	285	340	405	460	520	580	715	840	910	1025	1125	1255
H	150	180	200	225	270	300	355	390	445	495	530	620	730	--	--	--	--